




### 6401 Rapid System - with knife switch

**Housing:** In rolled hot-dip galvanized steel, with rounded edges to protect hand and with end caps in polycarbonate.  
**Painting:** Steel stove pre-enamelling with white polyester resin, UV-stabilized, anti-yellowing, upon phosphate treatment.  
**Lampholder:** In white polycarbonate, with contacts in phosphor bronze, quick connection, with protective collars to prevent lamp from falling. Socket G13.  
**Electric gear:** 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.  
**Standard supply:** Nylon ratchet fastener.  
**Mounting:** On track, directly to ceiling or wall.  
**Regulations:** Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK07 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).  
 These products can be installed on normally inflammable surfaces.  
**Additional gear:** Electronic ballast. Emergency kit.  
**Emergency light version:** If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

**Download**  
 DXF 2D  
 - d6401.dxf  
 Montaggi  
 - 6401\_501\_rapidsystem\_tn.pdf

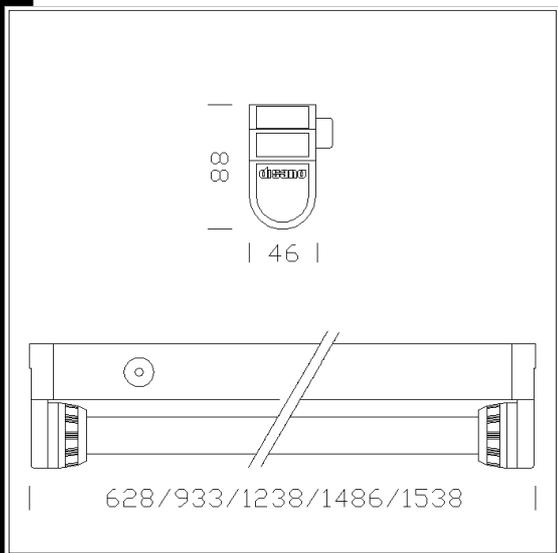

Code	Gear	Kg	Watt	Base	Lamps	Colour
237531-00	CEL	1,00	FL 1x36	G13	3350lm-4000K-Ra 1b	WHITE
238040-08	CEL	1,02	FL 1x18	G13	1350lm-4000K-Ra 1b	WHITE
238041-08	CEL	1,23	FL 1x30	G13	2350lm-4000K-Ra 1b	WHITE
237532-00	CEL	1,14	FL 1x58	G13	5200lm-4000K-Ra 1b	WHITE

#### Accessories

